


Contents

Sinks.....	SF-2
Epoxy Sinks.....	SF-4
Peg Boards.....	SF-8
Faucets.....	SF-9
Valves.....	SF-11
Electrical Fixtures.....	SF-13
Vandal-Resistant Fittings.....	SF-15
Service Fittings & Accessories Index.....	SF-18


Sinks


CAT. NO SS040
DESCRIPTION Sink Support




- Used for undermount epoxy sinks
- Designed for use with plastic laminate and wood cabinets only

SS040
Sink Support

- Designed for use with CiF Lab Solutions metal base sink cabinets only

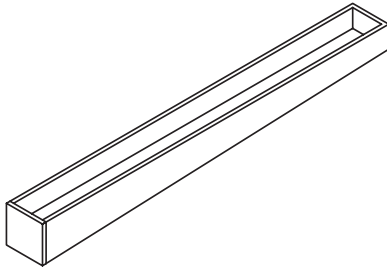
**CAT. NO SST01 (6-1/2" Trough Width)
SST02 (4" Trough Width)**
DESCRIPTION Epoxy Resin Trough Sinks

- Epoxy resin trough sinks are fabricated in lengths as required and have a slope of 1/8" (3mm) per 12" (305mm) length.


CAT. NO SSC01
DESCRIPTION Lipped Polypropylene Resin Cupsink

- Polypropylene resin cupsink that is molded in one piece with a 38mm (1 1/2") integral threaded outlet
- 6" (152 mm) diameter

SSC02
Lipped Polypropylene Resin Cupsink


- Polypropylene resin cupsink that is molded in one piece with a 38mm (1 1/2") integral threaded outlet
- 3" x 9" (76 x 229 mm)

SSC03
Lipped Polypropylene Resin Cupsink

- Polypropylene resin cupsink that is molded in one piece with a 38mm (1 1/2") integral threaded outlet
- 3" x 6" (76 x 152 mm)

Sinks (cont.)

Stainless Steel Sinks

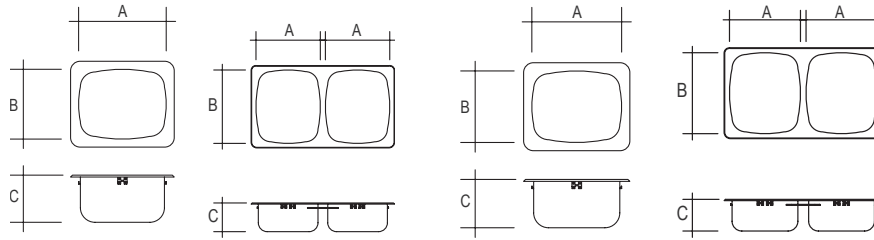
CAT. NO
DESCRIPTION

- T304 stainless steel self rimming sinks are fabricated from 20 gauge stainless steel with a satin finish. The underside of the sink is fully sound dampened and under coated to reduce condensation and resonance. Includes crumb cup waste assembly. T304 stainless steel sinks are used in general purpose areas. Dimensions shown are inside sink dimensions.

	A	B	C
SS800 single bowl	356 x 241	241 x 178	178 mm (14" x 9 1/2" x 7")
SS801 single bowl	356 x 406	406 x 254	254 mm (14" x 16" x 10")
SS802 single bowl	457 x 406	406 x 254	254 mm (18" x 16" x 10")
SS803 double bowl (each bowl)	356 x 406	406 x 254	254 mm (14" x 16" x 10")


- T316 stainless steel self rimming sinks are fabricated from 20 gauge stainless steel with a satin finish. The underside of the sink is fully sound dampened and under coated to reduce condensation and resonance. Includes crumb cup waste assembly. T316 stainless steel sinks are used in lab areas. Dimensions shown are inside sink dimensions.

	A	B	C
SS900 single bowl	356 x 241	241 x 178	178 mm (14" x 9 1/2" x 7")
SS901 single bowl	356 x 406	406 x 254	254 mm (14" x 16" x 10")
SS902 single bowl	457 x 406	406 x 254	254 mm (18" x 16" x 10")
SS903 double bowl (each bowl)	356 x 406	406 x 254	254 mm (14" x 16" x 10")

Stainless Steel Overflow Stand Pipe

For overflow stand pipes add the suffix "/OF" to the sink catalog number. When overflow stand pipes are specified, stainless steel sinks come with a corner drain, 38mm (1 1/2") duplex waste assembly and corner guard. Overflow stand pipe and corner guard are made from stainless steel.


Drainboard Sinks


CAT. NO Custom Design per Project

DESCRIPTION

- Custom fabrication only. Contact your representative for further details
- Drainboard sink units are custom fabricated and are available in both single and double bowl configurations using standard sink sizes. Sloping fluted drainboards and marine edges are options available. Available in T304 or T316 stainless steel.

Stainless Steel Cupsinks

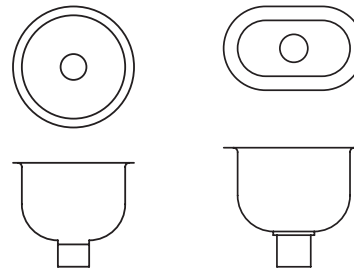

SSC04
SSC05

- 152mm (6") diameter
- 76 x 152mm (3" x 6")
- Stainless steel cupsinks are made from T316, 20 gauge stainless steel. Cupsinks are self rimming and are under coated to reduce condensation and resonance.
- Cupsinks include a 38mm (1 1/2") integral waste fitting.


Epoxy Sinks

STANDARD UNDERMOUNT SINKS – METRIC SIZES							
SINK NO.	OUTLET	WGT (KG)	DIMENSIONS (MM)				
			INSIDE BOWL			OUTLET	
			LENGTH	WIDTH	DEPTH	X	Y
U03C	CENTER	17	305	203	152	152	102
U05C	CENTER	22	356	254	152	178	127
U10C	CENTER	22	406	203	178	203	102
U10E	END	22	406	203	178	89	102
U15C	CENTER	34	406	305	203	203	152
U15E	END	34	406	305	203	114	152
U20	CORNER	39	406	406	191	102	305
U22C	CENTER	22	457	165	152	229	84
U24C	CENTER	38	457	356	267	229	178
U25	CORNER	40	457	381	203	89	89
U30	CORNER	49	457	381	279	89	89
U30C	CENTER	49	457	381	279	229	191
U33E	END	64	533	432	254	114	218
U35E	END	61	533	457	254	114	229
U40	CORNER	47	541	394	178	102	102
U45	CORNER	64	546	394	279	102	102
U50C	CENTER	54	610	406	203	305	203
U52E	END	77	599	447	274	102	229
U53E	END	85	620	467	427	109	236
U55	CORNER	60	635	381	254	89	89
U56C	CENTER	76	610	406	305	305	203
U59E	END	65	711	381	305	292	191
U63E	END	75	787	432	254	102	216
RS05C	CENTER	10	302	ROUND	191	CENTER	


Undermount Sink Styles



Dimensions Key: Side View



Top View




All dimensions are nominal. Cut sheets available upon request.

Epoxy Sinks (cont.)


STANDARD UNDERMOUNT SINKS – IMPERIAL SIZES							
SINK NO.	OUTLET	WGT (LB)	DIMENSIONS (IN)				
			INSIDE BOWL			OUTLET	
			LENGTH	WIDTH	DEPTH	X	Y
U03C	CENTER	17	12.0	8.0	6.0	6.0	4.0
U05C	CENTER	22	14.0	10.0	6.0	7.0	5.0
U10C	CENTER	22	16.0	8.0	7.0	8.0	4.0
U10E	END	22	16.0	8.0	7.0	3.5	4.0
U15C	CENTER	34	16.0	12.0	8.0	8.0	6.0
U15E	END	34	16.0	12.0	8.0	4.5	6.0
U20	CORNER	39	16.0	16.0	7.5	4.0	12.0
U22C	CENTER	22	18.0	6.5	6.0	9.0	3.3
U24C	CENTER	38	18.0	14.0	10.5	9.0	7.0
U25	CORNER	40	18.0	15.0	8.0	3.5	3.5
U30	CORNER	49	18.0	15.0	11.0	3.5	3.5
U30C	CENTER	49	18.0	15.0	11.0	9.0	7.5
U33E	END	64	21.0	17.0	10.0	4.5	8.6
U35E	END	61	21.0	18.0	10.0	4.5	9.0
U40	CORNER	47	21.3	15.5	7.0	4.0	4.0
U45	CORNER	64	21.5	15.5	11.0	4.0	4.0
U50C	CENTER	54	24.0	16.0	8.0	12.0	8.0
U52E	END	77	23.6	17.6	10.8	4.0	9.0
U53E	END	85	24.4	18.4	16.8	4.3	9.3
U55	CORNER	60	25.0	15.0	10.0	3.5	3.5
U56C	CENTER	76	24.0	16.0	12.0	12.0	8.0
U59E	END	65	28.0	15.0	12.0	11.5	7.5
U63E	END	75	31.0	17.0	10.0	4.0	8.5
RS05C	CENTER	21	11.9	ROUND	7.5	CENTER	

All dimensions are nominal. Cut sheets available upon request.


Undermount Sink Styles






Dimensions Key: Side View




Top View




Epoxy Sinks (cont.)

STANDARD DROP IN SINKS – METRIC SIZES							
SINK NO.	OUTLET	WGT (KG)	DIMENSIONS (MM)				
			INSIDE BOWL			OUTLET	
			LENGTH	WIDTH	DEPTH	X	Y
D01C	CENTER	4	229	152	147	114	76
D03C	CENTER	7	305	203	147	152	102
 A05	CORNER	8	356	254	127	89	89
D05	CORNER	10	356	254	157	89	89
D05C	CENTER	11	356	254	157	178	127
D10	END	9	406	203	173	114	102
D10C	CENTER	10	406	203	173	203	102
D15	CORNER	14	406	305	203	89	89
D15C	CENTER	14	406	305	203	203	152
D19	CORNER	19	406	406	244	89	89
D20	CORNER	15	406	406	191	89	89
D22C	CENTER	14	457	165	173	229	84
D24(C)	CENTER	14	457	356	267	229	178
 A25	CORNER	16	457	381	127	89	89
D25	CORNER	18	457	381	201	89	89
D30	CORNER	24	457	381	279	89	89
D30D*	CORNER	50	457	422	274	89	89
D30C	CENTER	23	457	381	274	229	191
D33E	END	27	533	432	249	114	216
D45	CORNER	29	546	394	279	89	89
D50C	CENTER	22	610	406	203	305	203
D52	CORNER	35	610	457	279	89	89
 A55	CORNER	21	635	381	122	89	89
D55	CORNER	28	635	381	254	89	89
D59	CORNER	28	711	381	300	89	89
DRS12	CENTER	8	305	ROUND	198	CENTER	


Drop In Sink Styles



Dimensions Key: Side View






Top View




*New double bowl drop in sink. The D30D sized bowls are molded as one for ease installation. ADA compliant sinks are designated by a symbol. Dimensions are nominal. Cut sheets available upon request.


Epoxy Sinks (cont.)

STANDARD DROP IN SINKS – IMPERIAL SIZES							
SINK NO.	OUTLET	WGT (LB)	DIMENSIONS (IN)				
			INSIDE BOWL			OUTLET	
			LENGTH	WIDTH	DEPTH	X	Y
D01C	CENTER	9	9.0	6.0	5.8	4.5	3.0
D03C	CENTER	16	12.0	8.0	5.8	6.0	4.0
 A05	CORNER	18	14.0	10.0	5.0	3.5	3.5
D05	CORNER	22	14.0	10.0	6.2	3.5	3.5
D05C	CENTER	24	14.0	10.0	6.2	7.0	5.0
D10	END	20	16.0	8.0	6.8	4.5	4.0
D10C	CENTER	22	16.0	8.0	6.8	8.0	4.0
D15	CORNER	30	16.0	12.0	8.0	3.5	3.5
D15C	CENTER	31	16.0	12.0	8.0	8.0	6.0
D19	CORNER	42	16.0	16.0	9.6	3.5	3.5
D20	CORNER	32	16.0	16.0	7.5	3.5	3.5
D22C	CENTER	30	18.0	6.5	6.8	9.0	3.3
D24(C)	CENTER	30	18.0	14.0	10.5	9.0	6.8
 A25	CORNER	35	18.0	15.0	5.0	3.5	3.5
D25	CORNER	39	18.0	15.0	7.9	3.5	3.5
D30	CORNER	53	18.0	15.0	11.0	3.5	3.5
D30D*	CORNER	110	39.0	16.6	10.8	3.5	3.5
D30C	CENTER	50	18.0	15.0	10.8	9.0	7.5
D33E	END	59	21.0	17.0	9.8	4.5	8.5
D45	CORNER	64	21.5	15.5	11.0	3.5	3.5
D50C	CENTER	48	24.0	16.0	8.0	12.0	8.0
D52	CORNER	77	24.0	18.0	11.0	3.5	3.5
 A55	CORNER	47	25.0	15.0	4.8	3.5	3.5
D55	CORNER	61	25.0	15.0	10.0	3.5	3.5
D59	CORNER	61	28.0	15.0	11.8	3.5	3.5
DRS12	CENTER	18	12.0	ROUND	7.8	CENTER	


Drop In Sink Styles



Dimensions Key: Side View




Top View



*New double bowl drop in sink. The D30D sized bowls are molded as one for ease installation. ADA compliant sinks are designated by a symbol. Dimensions are nominal. Cut sheets available upon request.


Peg Boards

Stainless Steel		
Model No.	Size (W x H)	No. of Pegs
V1824	18" x 24"	15
V1830	18" x 30"	24
V1836	18" x 36"	30
V2418	24" x 18"	16
V2424	24" x 24"	20
V2430	24" x 30"	32
V2436	24" x 36"	40
V2624	26" x 24"	20
V3024	30" x 24"	25
V3030	30" x 30"	50
C3036	30" x 36"	40
V3624	36" x 24"	30
V3630	36" x 30"	60
V3636	36" x 36"	66
V4824	48" x 24"	40
V4830	48" x 30"	48
V4836	48" x 36"	88

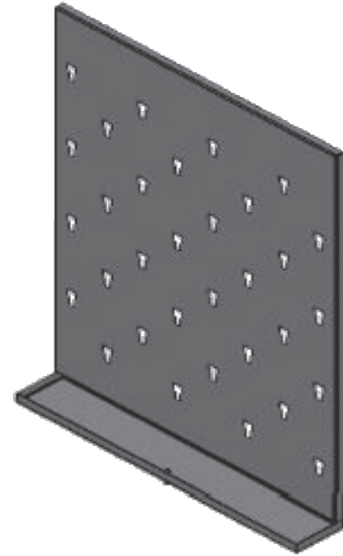

* Add -2" to the end of the part number for a drip trough that is only 2", otherwise it is 4".

Epoxy or Phenolic							
Type of Pegboard	Model Number	Description					
		Drip Trough	# of Pegs	Height		Width	
				In	MM	In	MM
Epoxy Resin	SP550	With stainless steel drip trough	18	24	610	24	610
Epoxy Resin	SP551	With stainless steel drip trough	22	24	610	36	914
Epoxy Resin	SP552	With stainless steel drip trough	33	36	914	36	914
Epoxy Resin	SP553	With stainless steel drip trough	45	36	914	48	1219
Phenolic Resin	SP580	With stainless steel drip trough	18	24	610	24	610
Phenolic Resin	SP581	With stainless steel drip trough	22	24	610	36	914
Phenolic Resin	SP582	With stainless steel drip trough	33	36	914	36	914
Phenolic Resin	SP583	With stainless steel drip trough	45	36	914	48	1219

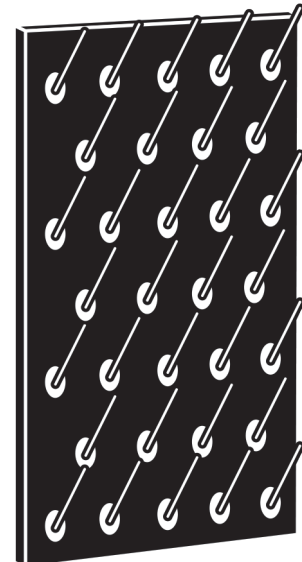

Faucets

Mixing Faucets




CAT. NO **L411 (6" Rigid Gooseneck)**
L414 (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted one hole mixer with swivel gooseneck and detachable nozzle




L411-BH (6" Rigid Gooseneck)
L414-BH (6" Rigid/Swing Gooseneck)

• Deck mounted one hole mixer with ADA-friendly blade handles, swivel gooseneck and detachable nozzle



L411VB (6" Rigid Gooseneck)
L414VB (6" Rigid/Swing Gooseneck)

• Deck mounted one hole mixer with vacuum breaker gooseneck and detachable nozzle



CAT. NO **L411VB-BH (6" Rigid Gooseneck)**
L414VB-BH (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted one hole mixer with ADA-friendly blade handles, vacuum breaker gooseneck and detachable nozzle



L211-WSA-BH (6" Rigid Gooseneck)
L214-WSA-BH (6" Rigid/Swing Gooseneck)

• Panel mounted mixing faucet with mounting shanks and wrist blade handles



L211VB-WSA-BH (6" Rigid Gooseneck)
L214VB-WSA-BH (6" Rigid/Swing Gooseneck)

• Panel mounted mixing faucet with vacuum breaker gooseneck, mounting shanks and wrist blade handles

Pure Water Faucets



CAT. NO **L681 (6" Rigid Gooseneck)**
L684 (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted, self closing, tin-lined brass, pure water faucet



L691 (6" Rigid Gooseneck)
L694 (6" Rigid/Swing Gooseneck)

• Deck mounted, manual controlled, tin-lined brass, pure water faucet



L691-BH (6" Rigid Gooseneck)

• Deck mounted, manual controlled, tin-lined brass, pure water faucet with wrist blade handle



CAT. NO **L7833 (6" Rigid Gooseneck)**

DESCRIPTION • Deck mounted, polypropylene-lined, manual control




L2784WSA (6" Rigid/Swing Gooseneck)

• Panel mounted, tin-lined brass, self-closing control

Faucets (cont.)

Single Water Faucets



CAT. NO **L611 (6" Rigid Gooseneck)**
L614 (6" Rigid/Swing Gooseneck)

L611VB (6" Rigid Gooseneck)
L614VB (6" Rigid/Swing Gooseneck)

L611-BH (6" Rigid Gooseneck)
L614-BH (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted laboratory single faucet

• Deck mounted laboratory single faucet with vacuum breaker

• Deck mounted laboratory single faucet with blade handle



CAT. NO **L611VB-BH (6" Rigid Gooseneck)**
L614VB-BH (6" Rigid/Swing Gooseneck)

L2714-WSA

L2714VB-WSA

DESCRIPTION • Deck mounted laboratory single faucet with vacuum breaker and wrist blade handle

• Wall mounted single faucet with aerator

• Wall mounted single faucet with vacuum breaker and aspirator (filter pump)

Pre-Rinse Faucets






CAT. NO **PR411**

PR1711WSA

DESCRIPTION • Pre-rinse Unit, deck-mounted

• Pre-rinse Unit, panel-mounted

Combination Faucets



CAT. NO **L5400-WSA**

L5400-WSA-BH

L66VB-WSA

DESCRIPTION • Combination single faucet and double gas outlets


• Combination single faucet and double gas outlets with blade handles

• Combination single faucet with vacuum breaker and double gas outlets with blade handles

Valves


Ball Valve Hose Cocks

Ball valve hose cocks incorporate a floating ball valve design, have a 10mm (3/8") M.I.P. inlet and are chrome plated forged brass bodies. Ball valve hose cocks must be used for natural gas or propane. Amperages for electrical outlets are available.



CAT. NO L4100-158FT

DESCRIPTION


- Wall-mounted single outlet ball valve hose cock
- For direct mounting to nipple stubbed out of wall where there is no access behind wall


L4100-141FT

- Wall-mounted double outlet ball valve hose cock
- For direct mounting to nipple stubbed out of wall where there is no access behind wall



L4100-158WSA

- Panel mounted single outlet ball valve hose cock



CAT. NO L4100-141WSA

DESCRIPTION


- Panel mounted double outlet 90-degree ball valve hose cock


L4100-131WSA

- Deck mounted single outlet ball valve hose cock



L4100-132AWSA

- Deck mounted dual outlet 90-degree ball valve hose cock


CAT. NO L4100-132SWSA

DESCRIPTION

- Deck mounted dual outlet 180-degree ball valve hose cock



L4100-134WSA

- Deck mounted quad outlet ball valve hose cock

Valves (cont.)

Needle Valve Hose Cocks

Needle valve hose cocks provide fine flow control and have a 6mm (1/4") I.P. tailpiece. Specify service use when ordering i.e. gas/air/vac.






CAT. NO **L4880FT-325**

DESCRIPTION

- Wall-mounted single outlet needle valve hose cock
- For direct mounting to nipple stubbed out of wall where there is no access behind wall

CAT. NO **L2880-141FT**

- Wall-mounted double outlet needle valve hose cock
- For direct mounting to nipple stubbed out of wall where there is no access behind wall



CAT. NO **L2880-141WSA**

DESCRIPTION



- Panel mounted double outlet 90-degree needle valve hose cock

CAT. NO **L2880-131WSA**

- Deck mounted single outlet needle valve hose cock

CAT. NO **L2880-132AWSA**

- Deck mounted dual outlet 90-degree needle valve hose cock



CAT. NO **L2880-132SWSA**

DESCRIPTION


- Deck mounted dual outlet 180-degree needle valve hose cock

CAT. NO **L2880-134WSA**

- Deck mounted quad outlet needle valve hose cock

Electrical Fixtures


Power Strips


CAT. NO **OS060**
CAT. NO **OS100**
DESCRIPTION 6-Outlet Power Strip

DESCRIPTION Pop-Up Power Strip

Flush Mounted Electrical Outlets

Flush mounted electrical outlets are 125 V. / 15 A. GFI outlet with stainless steel cover plate. Other voltages and amperages are available.


CAT. NO **E2333GF-SA**
CAT. NO **E2533GF-SA**
DESCRIPTION


- Flush mounted
- Single gang

DESCRIPTION

- Flush mounted
- Double gang

Electrical Pedestal Outlets



Pedestal boxes are made from 17 gauge chrome plated steel with a 19mm (3/4") diameter, 76mm (3") long galvanized shank and lock nut. Electrical outlets are 125 V. / 15 A. GFI outlets with stainless steel cover plate. Other voltages and amperages are available.


CAT. NO **E333GF-SA-WS** (Single Face, Single Gang)
E433GF-SA-WS (Double Face, Single Gang)

CAT. NO **E533GF-SA-WS** (Single Face, Double Gang)
E633GF-SA-WS (Double Face, Double Gang)

Electrical Fixtures (cont.)

Electrical Raceway

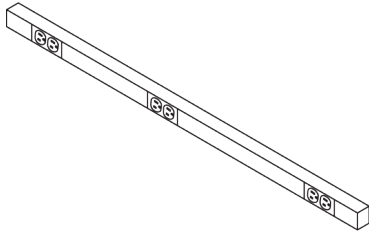
CAT. NO **RW300**
DESCRIPTION

- Steel surface mounted single row raceway for power.
- G-3000 Raceway is mountable on walls or furniture and has a wide selection of fittings and boxes.
- Raceway has a baked enamel finish available in grey or ivory.
- cUL and UL Listed

CAT. NO **RW400**

- Steel surface mounted double row raceway for power and data/communication.
- G-4000 Raceway is mountable on walls or furniture and has a wide selection of fittings and boxes.
- Raceway has a baked enamel finish available in grey or ivory.
- cUL and UL Listed

Vandal-Resistant Fittings

Vandal-resistant features

- Dual inlet shanks prevent turning fixture on counter.
- Inlet shanks are machined from solid brass bar stock or heavy wall steel pipe to resist breakage.
- Laboratory ball valves (except where used for vacuum service) have internal check valves to prevent backflow into gas system.
- Index discs are cemented in place.
- Fixture riser is 1/2" IPS heavy wall pipe to resist bending and breakage.
- Hooded nylon handle conceals water valve stem and packing nut. Nut has set screw to prevent removal.
- Round serrated hose end is secured with set screw to prevent removal.
- All threaded connections are secured with cement.

Mixing Faucets



CAT. NO **VR411** (6" Rigid Gooseneck)
VR414 (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted one hole mixer with swivel gooseneck and detachable nozzle




VR411-BH (6" Rigid Gooseneck)
VR414-BH (6" Rigid/Swing Gooseneck)

• Deck mounted one hole mixer with ADA-friendly blade handles, swivel gooseneck and detachable nozzle



VR411VB (6" Rigid Gooseneck)
VR414VB (6" Rigid/Swing Gooseneck)

• Deck mounted one hole mixer with vacuum breaker gooseneck and detachable nozzle




CAT. NO **VR411VB-BH** (6" Rigid Gooseneck)
VR414VB-BH (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted one hole mixer with ADA-friendly blade handles, vacuum breaker gooseneck and detachable nozzle

Vandal-Resistant Fittings (cont.)

Single Water Faucets




CAT. NO VR611 (6" Rigid Gooseneck)
VR614 (6" Rigid/Swing Gooseneck)

DESCRIPTION • Deck mounted laboratory single faucet



CAT. NO VR611VB (6" Rigid Gooseneck)
VR614VB (6" Rigid/Swing Gooseneck)

• Deck mounted laboratory single faucet with vacuum breaker



CAT. NO VR611-BH (6" Rigid Gooseneck)
VR614-BH (6" Rigid/Swing Gooseneck)


• Deck mounted laboratory single faucet with blade handle



CAT. NO VR611VB-BH (6" Rigid Gooseneck)
VR614VB-BH (6" Rigid/Swing Gooseneck)


DESCRIPTION • Deck mounted laboratory single faucet with vacuum breaker and wrist blade handle

Combination Faucets




CAT. NO VR5300-110

DESCRIPTION • Deck-mounted combination single faucet and double gas cocks




CAT. NO VR5300-110-BH

• Deck-mounted combination single faucet and double gas cocks with blade handles




CAT. NO VR5600-WSA

• Deck-mounted combination single faucet and two individual gas cocks
• Three inlets so valves can be used for different services



CAT. NO VR5800-110

DESCRIPTION • Deck-mounted combination mixing faucet and double gas cocks




CAT. NO VR5800-110-BH

• Deck-mounted combination mixing faucet and double gas cocks with blade handles


Vandal-Resistant Fittings (cont.)

Ball Valve Hose Cocks


Ball valve hose cocks incorporate a floating ball valve design, have a 10mm (3/8") M.I.P. inlet and are chrome plated forged brass bodies. Ball valve hose cocks must be used for natural gas or propane. Amperages for electrical outlets are available.


CAT. NO **VR4100-158WSA**


DESCRIPTION • Panel mounted single outlet ball valve hose cock


CAT. NO **VR4100-131WSA**


• Deck mounted single outlet ball valve hose cock

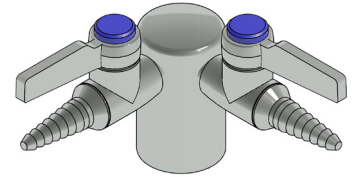
CAT. NO **VR4100-132AWSA**

• Deck mounted dual outlet 90-degree ball valve hose cock


CAT. NO **VR4100-132SWSA**


DESCRIPTION • Deck mounted dual outlet 180-degree ball valve hose cock


CAT. NO **VR4100-134WSA**

• Deck mounted quad outlet ball valve hose cock

Electrical Pedestal Outlets

Pedestal boxes are made from 17 gauge chrome plated steel with a 19mm (3/4") diameter, 76mm (3") long galvanized shank and lock nut. Electrical outlets are 125 V. / 15 A. GFI outlets with stainless steel cover plate. Other voltages and amperages are available.


CAT. NO **VRE333GF-SA-WS** (Single Face, Single Gang)
VRE433GF-SA-WS (Double Face, Single Gang)

CAT. NO **VRE533GF-SA-WS** (Single Face, Double Gang)
VRE633GF-SA-WS (Double Face, Double Gang)

Service Fittings & Accessories Index

Sinks	SF-2
SS040	SF-2
SS040	SF-2
SST01	SF-2
SST02	SF-2
SSC01	SF-2
SSC02	SF-2
SSC03	SF-2
Custom Design per Project.....	SF-3
SSC04	SF-3
SSC05	SF-3

Epoxy Sinks	SF-4
--------------------------	-------------

Peg Boards	SF-8
-------------------------	-------------

Faucets	SF-9
----------------------	-------------

L411	SF-9
L414	SF-9
L411-BH	SF-9
L414-BH	SF-9
L411VB	SF-9
L414VB	SF-9
L411VB-BH	SF-9
L414VB-BH	SF-9
L211-WSA-BH	SF-9
L214-WSA-BH	SF-9
L211VB-WSA-BH	SF-9
L214VB-WSA-BH	SF-9
L681	SF-9
L684	SF-9
L691	SF-9
L694	SF-9
L691-BH	SF-9
L7833	SF-9
L2784WSA	SF-9
L611	SF-10
L614	SF-10
L611VB	SF-10
L614VB	SF-10
L611-BH	SF-10
L614-BH	SF-10
L611VB-BH	SF-10
L614VB-BH	SF-10
L2714-WSA	SF-10
L2714VB-WSA	SF-10
PR411	SF-10
PR1711WSA	SF-10
L5400-WSA	SF-10
L5400-WSA-BH	SF-10
L66VB-WSA	SF-10

Valves	SF-11
---------------------	--------------

L4100-158FT	SF-11
L4100-141FT	SF-11
L4100-158WSA	SF-11
L4100-141WSA	SF-11

L4100-131WSA	SF-11
L4100-132AWSA	SF-11
L4100-132SWSA	SF-11
L4100-134WSA	SF-11
L4880FT-325	SF-12
L2880-141FT	SF-12
L2880-141WSA	SF-12
L2880-131WSA	SF-12
L2880-132AWSA	SF-12
L2880-132SWSA	SF-12
L2880-134WSA	SF-12

Electrical Fixtures	SF-13
----------------------------------	--------------

OS060	SF-13
OS100	SF-13
E2333GF-SA	SF-13
E2533GF-SA	SF-13
E333GF-SA-WS	SF-13
E433GF-SA-WS	SF-13
E5333GF-SA-WS	SF-13
E633GF-SA-WS	SF-13
RW300	SF-14
RW400	SF-14

Vandal-Resistant Fittings	SF-15
--	--------------

VR411	SF-15
VR414	SF-15
VR411-BH	SF-15
VR414-BH	SF-15
VR411VB	SF-15
VR414VB	SF-15
VR411VB-BH	SF-15
VR414VB-BH	SF-15
VR611	SF-16
VR614	SF-16
VR611VB	SF-16
VR614VB	SF-16
VR611-BH	SF-16
VR614-BH	SF-16
VR611VB-BH	SF-16
VR614VB-BH	SF-16
VR5300-110	SF-16
VR5300-110-BH	SF-16
VR5600-WSA	SF-16
VR5800-110	SF-16
VR5800-110-BH	SF-16
VR4100-158WSA	SF-17
VR4100-131WSA	SF-17
VR4100-132AWSA	SF-17
VR4100-132SWSA	SF-17
VR4100-134WSA	SF-17
VRE333GF-SA-WS	SF-17
VRE433GF-SA-WS	SF-17
VRE5333GF-SA-WS	SF-17
VRE633GF-SA-WS	SF-17

Service Fittings & Accessories Index	SF-18
---	--------------